

A.I. Satellite Distributors

5061 Contractors Drive

Loves Park, IL. 61111

815.969.7500 Phone

815.969.7500 Fax



Overhang Mount EM-6
Mount under the Eaves overhang.
Works well with Hip Roofs
with Gutters. The Em-4 or EM-5 can be
added to enhance this mount.
Support Struts recommended
Sold Separately, Order Part# SS-1-158



The EM-6 is designed to lag bolt to the under side of the eave. Installers can mount the bracket on the pitch or the horizontal of the eave. Mount a J-Pipe or any of our EM-Series, Drilling holes in the roof is not required. Get around gutters, tile roofs or any obstruction.

Specifications:

Face Width: 4 1/2"


Length : 7"

Outer Bracket 7"

Six Lag Bolt T-Pattern

Heavy Gauge Steel

Powder Coated

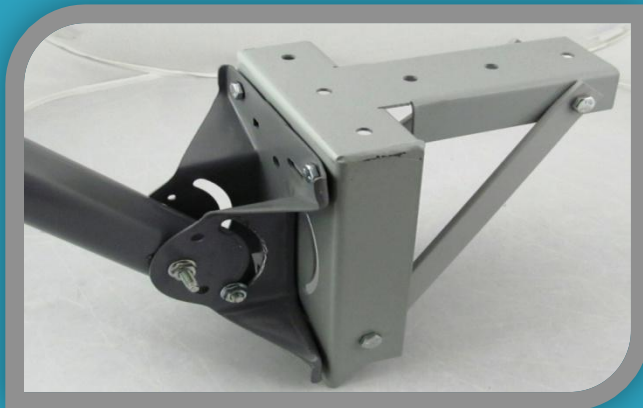

Installation: Locate the cross members under the eave connection between the truss and the outer eaves fascia. Lag bolt o the 2x4"s using six lag bolts. Bolt the J-Pipe to the face of the mount.